


| Typ     | Ød | h<br>±0,15 | H1 | A  | A1   | W    | M   | Ød1  | e    | T   | Lmax <sup>1)</sup> | Masa<br>[kg/m] |
|---------|----|------------|----|----|------|------|-----|------|------|-----|--------------------|----------------|
| ITSU-12 | 12 | 14,5       | 3  | 11 | 5,5  | 5,4  | M4  | 4,5  | 15,5 | 75  | 4000               | 0,21           |
| ITSU-16 | 16 | 18         | 3  | 14 | 7,0  | 7,0  | M5  | 5,5  | 16,0 | 75  | 4000               | 0,31           |
| ITSU-20 | 20 | 22         | 3  | 17 | 8,5  | 8,1  | M6  | 6,6  | 20,0 | 75  | 4000               | 0,45           |
| ITSU-25 | 25 | 26         | 3  | 21 | 10,5 | 10,3 | M8  | 9,0  | 25,0 | 75  | 4000               | 0,59           |
| ITSU-30 | 30 | 30         | 3  | 23 | 11,5 | 11,0 | M10 | 11,0 | 30,0 | 100 | 4000               | 0,74           |
| ITSU-40 | 40 | 39         | 4  | 30 | 15,0 | 15,0 | M12 | 13,5 | 38,0 | 100 | 4000               | 1,26           |

Wszystkie wymiary w tabeli w [mm], jeśli nie podano innej jednostki

Sposób oznaczania

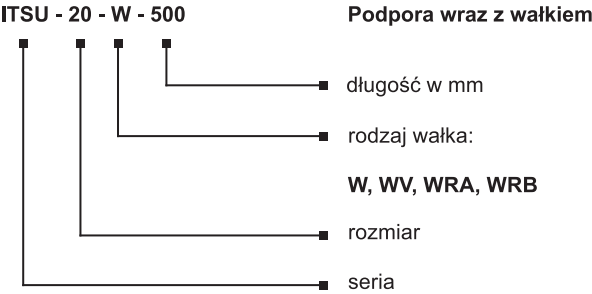

- Masa bez wałka.
  - W zależności od długości wałka prowadzącego, podpora może składać się z kilku części.
- 1) Długość maksymalna pojedynczej podpory.